



ETATRON

AMERICA




Vehicle Wash Electric Diaphragm Metering Pump

The PKX diaphragm dosing pump is simple to use, highly reliable, and provides a compact design.

PKX ACCURATELY INJECTS:

- Presoaks
- Detergents
- Waxes
- Drying Aids

Long lasting unique one-piece Teflon® diaphragm design!
Range from .55 to 2.81 ounces per minute.

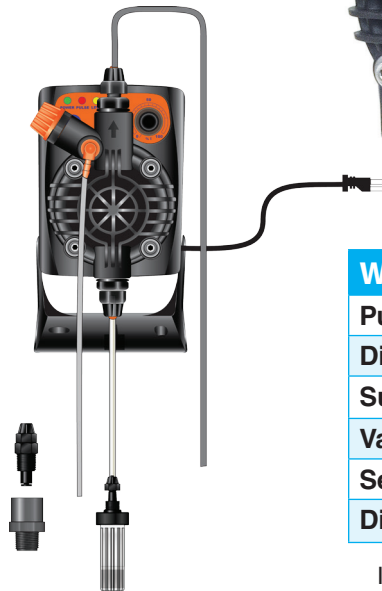

Standard Features
Adjustable while running
Flashing LED indicates pump is operating
Hot water applications up to 140°F
Manual air bleed pump head for fast priming
Wall or base mounting option
Suction stops immediately when powered off
24 or 120V - 50/60 Hz
Adjustable from 0 to 100%
IP65 acid resistant housing
Polypropylene housing

Wetted Parts	Materials
Pump Head	Polypropylene
Diaphragm	Teflon®
Suction Tube	PVC
Valves	Viton
Seals	Viton
Discharge Tube	Polyethylene

Includes a 6 1/2' (2 meters) suction tubing, 13' (4 meters) discharge tubing, mounting hardware, foot valve, and injection fitting.

2090 Sunnydale Blvd. • Clearwater, FL 33765 • 800-451-6628 • 727-451-1198 • Fax: 727-451-1197

www.etatronamerica.com

ISO 9001 Certified