


PAX 403

ACCUMULATORS

GENERAL PUMP *A member of the Interpump Group*

ACCUMULATORS

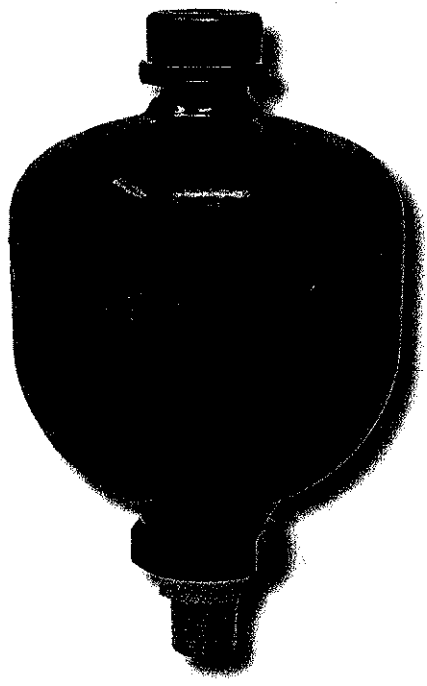


SPECIFICATIONS

Part Number	686010
Maximum Flow Rate	40 GPM
Operating Pressure	3000 PSI
Maximum Temperature	180° F
Factory Pre-Charge	700 PSI Nitrogen
Port Size: Inlet	1/2" NPT-M
Nitrogen Charging Port	M28 x 1.5
Accumulator Volume	45 cu. in.
Dimensions	Ø 4.8 x 7.8 in.
Weight	6.2 lb.
Materials	Polyurethane-Coated Shell with Stainless Steel Inlet and Buna-N Diaphragm


NOTE: Check accumulator every three months, making certain it is properly charged.

Need
SDs

WARNING: High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices properly could result in personal injury or damage to pump or property. GP does not assume any liability or responsibility for the operation of the user's high pressure system.



WARNING: This product can expose you to chemicals including lead, which is know to the state of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

 General Pump is a member of the Interpump Group



Ref 300099 Rev H
04-23



GENERAL PUMP • 1174 Northland Drive • Mendota Heights, MN 55120
Phone: 651.686.2199 • Fax: 800.535.1745 • email: sales@gpcompanies.com • www.generalpump.com