


3/8" Elima-Matic Bolted Plastic

with Non-Metallic Center Sections

E8

Performance

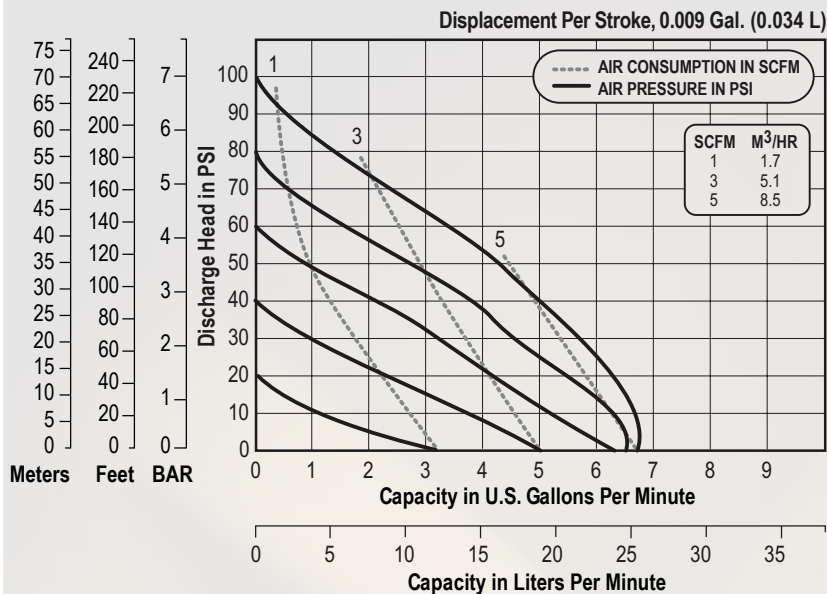

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

Flow Rate

Adjustable to 0-6.8 gpm (25.7 lpm)

Port Size

Suction 3/8" NPT (BSP)

Discharge 3/8" NPT (BSP)

Air Inlet 1/4" NPT

Air Exhaust 1/4" NPT

Suction Lift

Dry 8' (2.44 m)

Max Solid Size (Diameter)

. 0.10" (2.25 mm)

Max Noise Level 78 dB(A)

Shipping Weights

Polypropylene 3 lbs (1.40 kg)

Kynar 4.5 lbs. (2.04 kg)

Dimensions

