

PROPANE TANK FAQ

How much is shipping?

Your shipping cost for this propane tank varies greatly based geographic area. 500 and 1000 gallon tanks will require a custom made pallet at an additional fee.

Propane tanks typically ship from our Pennsylvania warehouse. There are no Free Shipping offers on propane tanks.

Can I pick up my tank?

You may pick up your tank at our Pennsylvania warehouse. (860 Anderson Ferry Rd. Mount Joy, PA 17552) On occasion we will ship a propane tank to our Texas or Nevada distribution center for you to pick up. You are responsible for all handling from our TX or NV dock to your door.

What comes with the tank?

No installation parts come with the tanks. The tank does not include a regulator. You must be able to remove your tank from the delivery truck. The driver will not be able to help you.

Do you provide service or installation?

Kleen-Rite does not provide service or installation for propane tanks. This is a freight delivery only. You will need to contract with a local propane distributor to install and fill your tank.

Are there any quantity discounts?

Kleen-Rite has no quantity break pricing on propane tanks.


Do I have to pay tax for the tank?

Tax will be collected for any tank sold in 3 states: PA, TX and NV.

What are the specs of the tank?

Please reference the following page below.

Quality Steel Corporation AG Propane Tanks

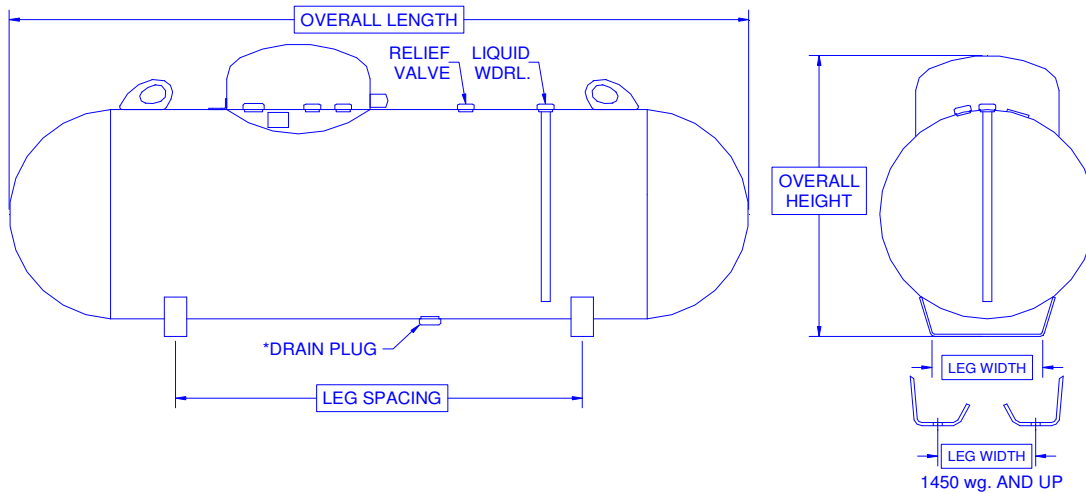

APPROXIMATE ABOVEGROUND VESSEL DIMENSIONS AND SPECIFICATIONS

WATER CAPACITY	DIAMETER (OD)	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT	LEG** WIDTH	LEG** SPACING	WEIGHT (lbs.)	***QUANTITY	
								FULL LOAD	PER STACK
*120 wg.	24"	Ellip.	5'-8"	2'-10"	1'-1 1/2"	2'-10 1/2" or 3'-11"	260	108 112	16 14
*250 wg.	30"	Hemi.	7'-10"	3'-6"	1'-5"	4'-11"	480	54	9
*320 wg.	30"	Hemi.	9'-7"	3'-6"	1'-5"	5'	620	45	9
500 wg.	37 1/2"	Hemi.	10'	4'	1'-8"	5'	950	37 30	8 6
1000 wg.	41"	Hemi.	16'	4'-3"	1'-8"	10'-1"	1,800	15	5
1450 wg.	46 1/2"	Ellip.	17'-4"	4'-9"	1'-9"	11'-7"	2,650	12	4
1990 wg.	46 1/2"	Ellip.	23'-11"	4'-9"	1'-9"	16'	3,520	8	4

Dimensions and specifications shown are approximate. Individual vessels may vary.

* Drain plug may not be available in this size. By special request only.

** Leg spacing +/- 2". Leg widths and spacing may vary based on mfg. location. Check with your salesperson for details. 120, 250, 320 wg. Standard tanks - no holes in legs (one center hole on request). 500 and 1000 wg. standard tanks - 2 - 3/4" holes, 16" on center each leg. 1450 wg. and up as shown above.

*** Full load and stack quantities vary by shipping location. Check with your salesperson for details.

General Specifications

- Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1. Complies with NFPA 58.
- Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board. All standard vessels UL listed (UL 644 - Container Assemblies for LP-Gas). Standard vessels available with CRN (Canadian Registration Number).
- Vessels are either powder coated with TGIC polyester or primed with liquid epoxy and coated with liquid urethane top coat.
- All vessels are shipped vacuum pre-purged to enable simplified first fill of the vessel.